

FIG. 2

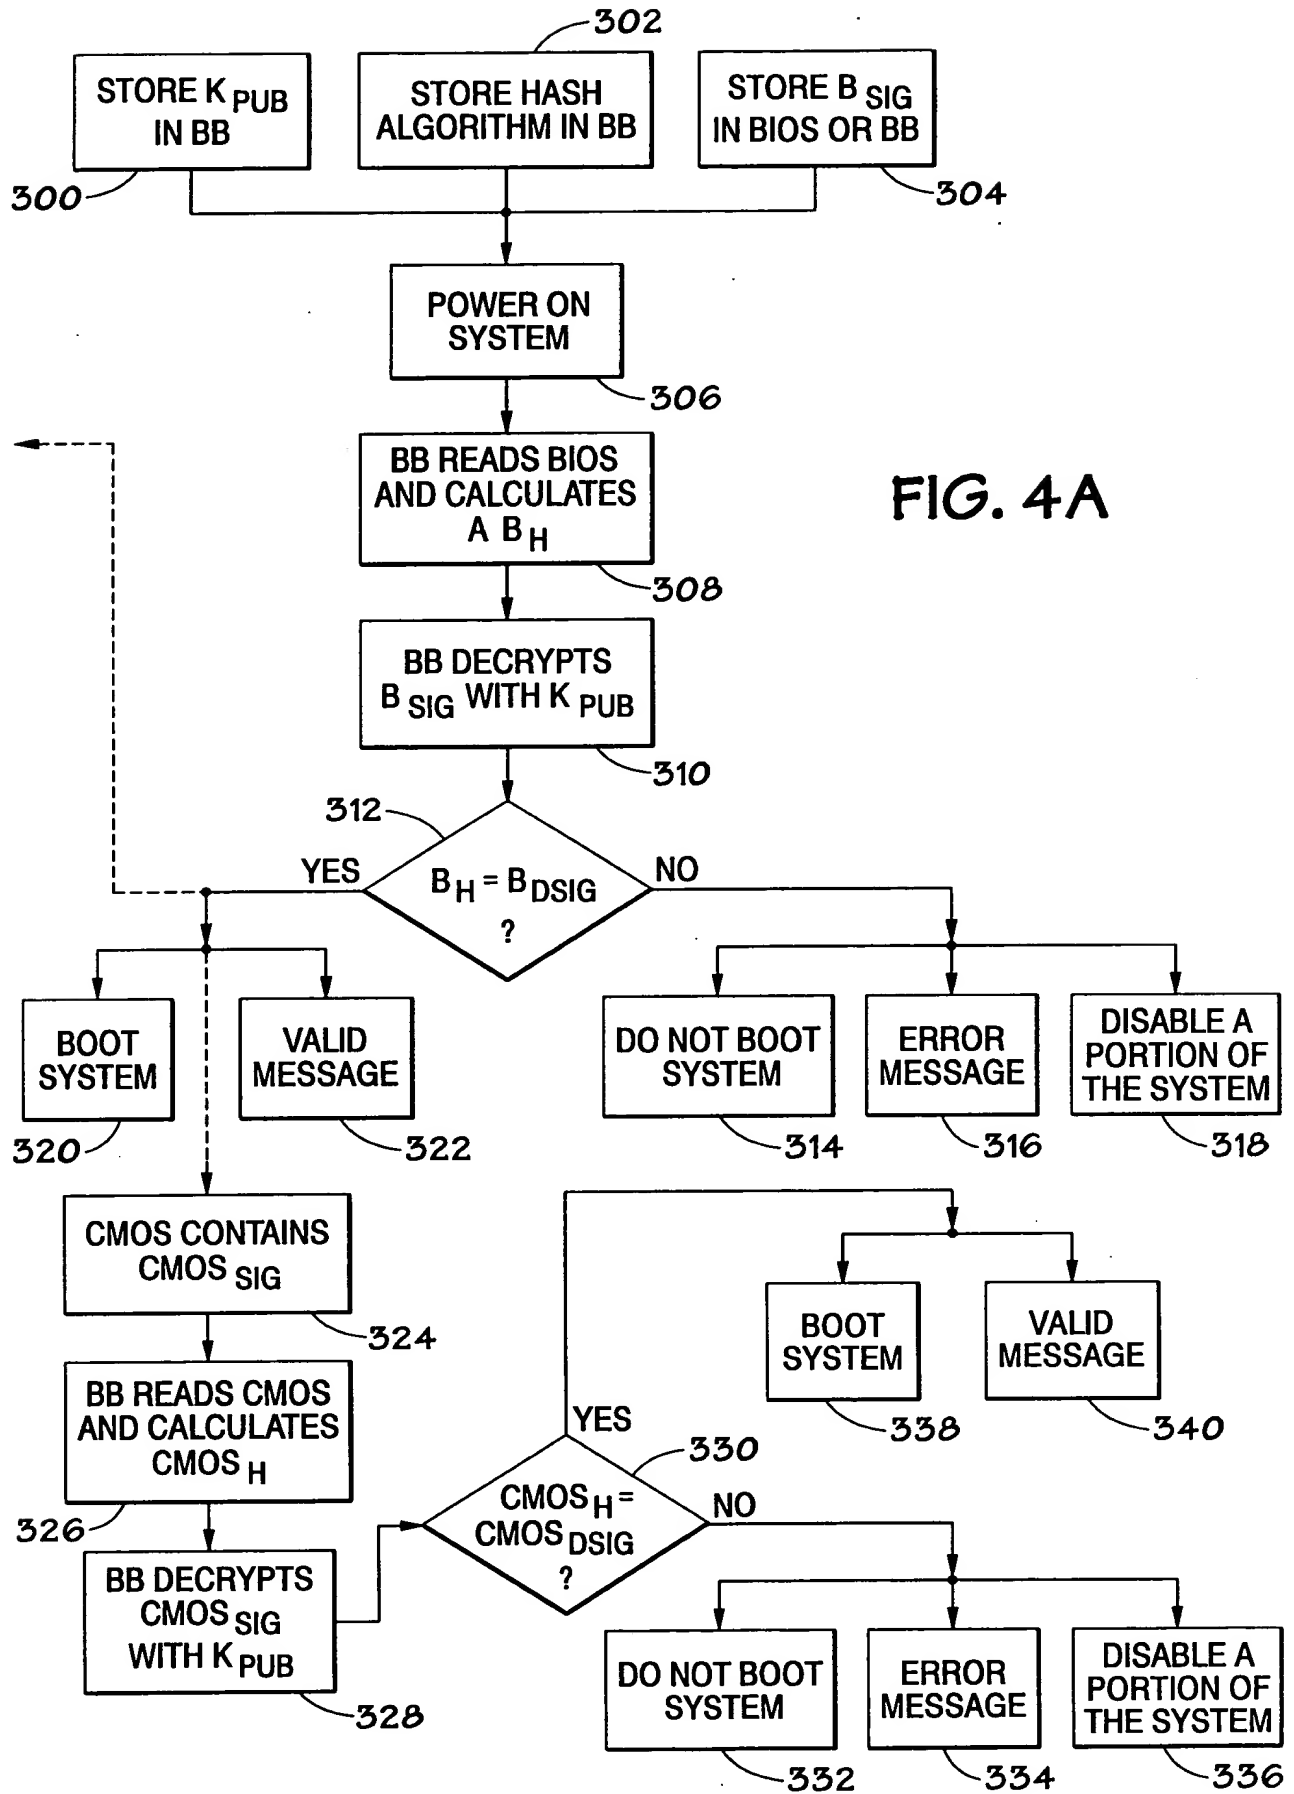
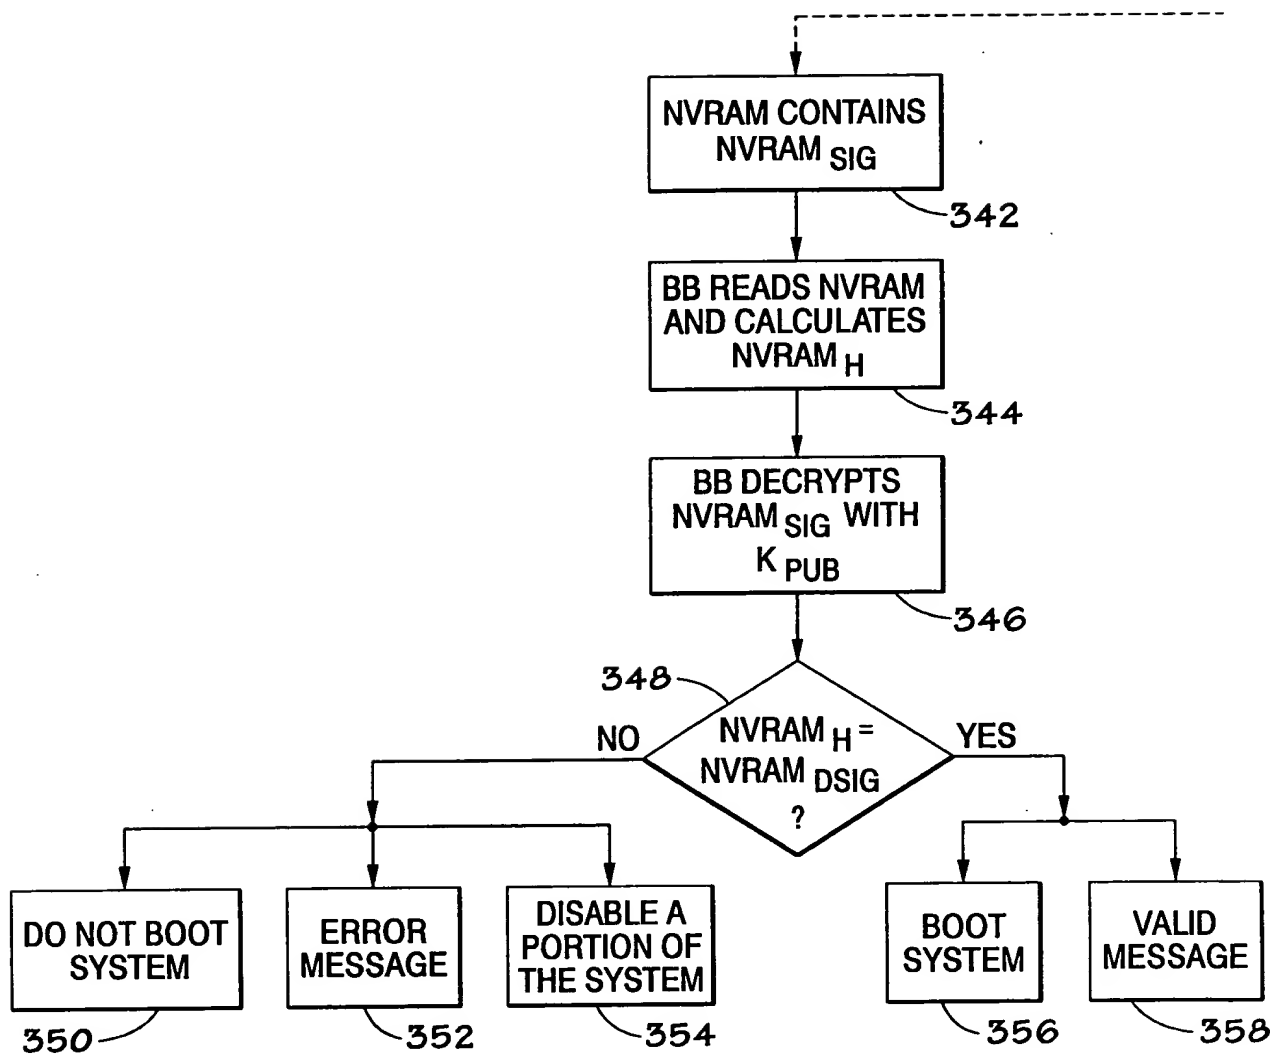


FIG. 4B



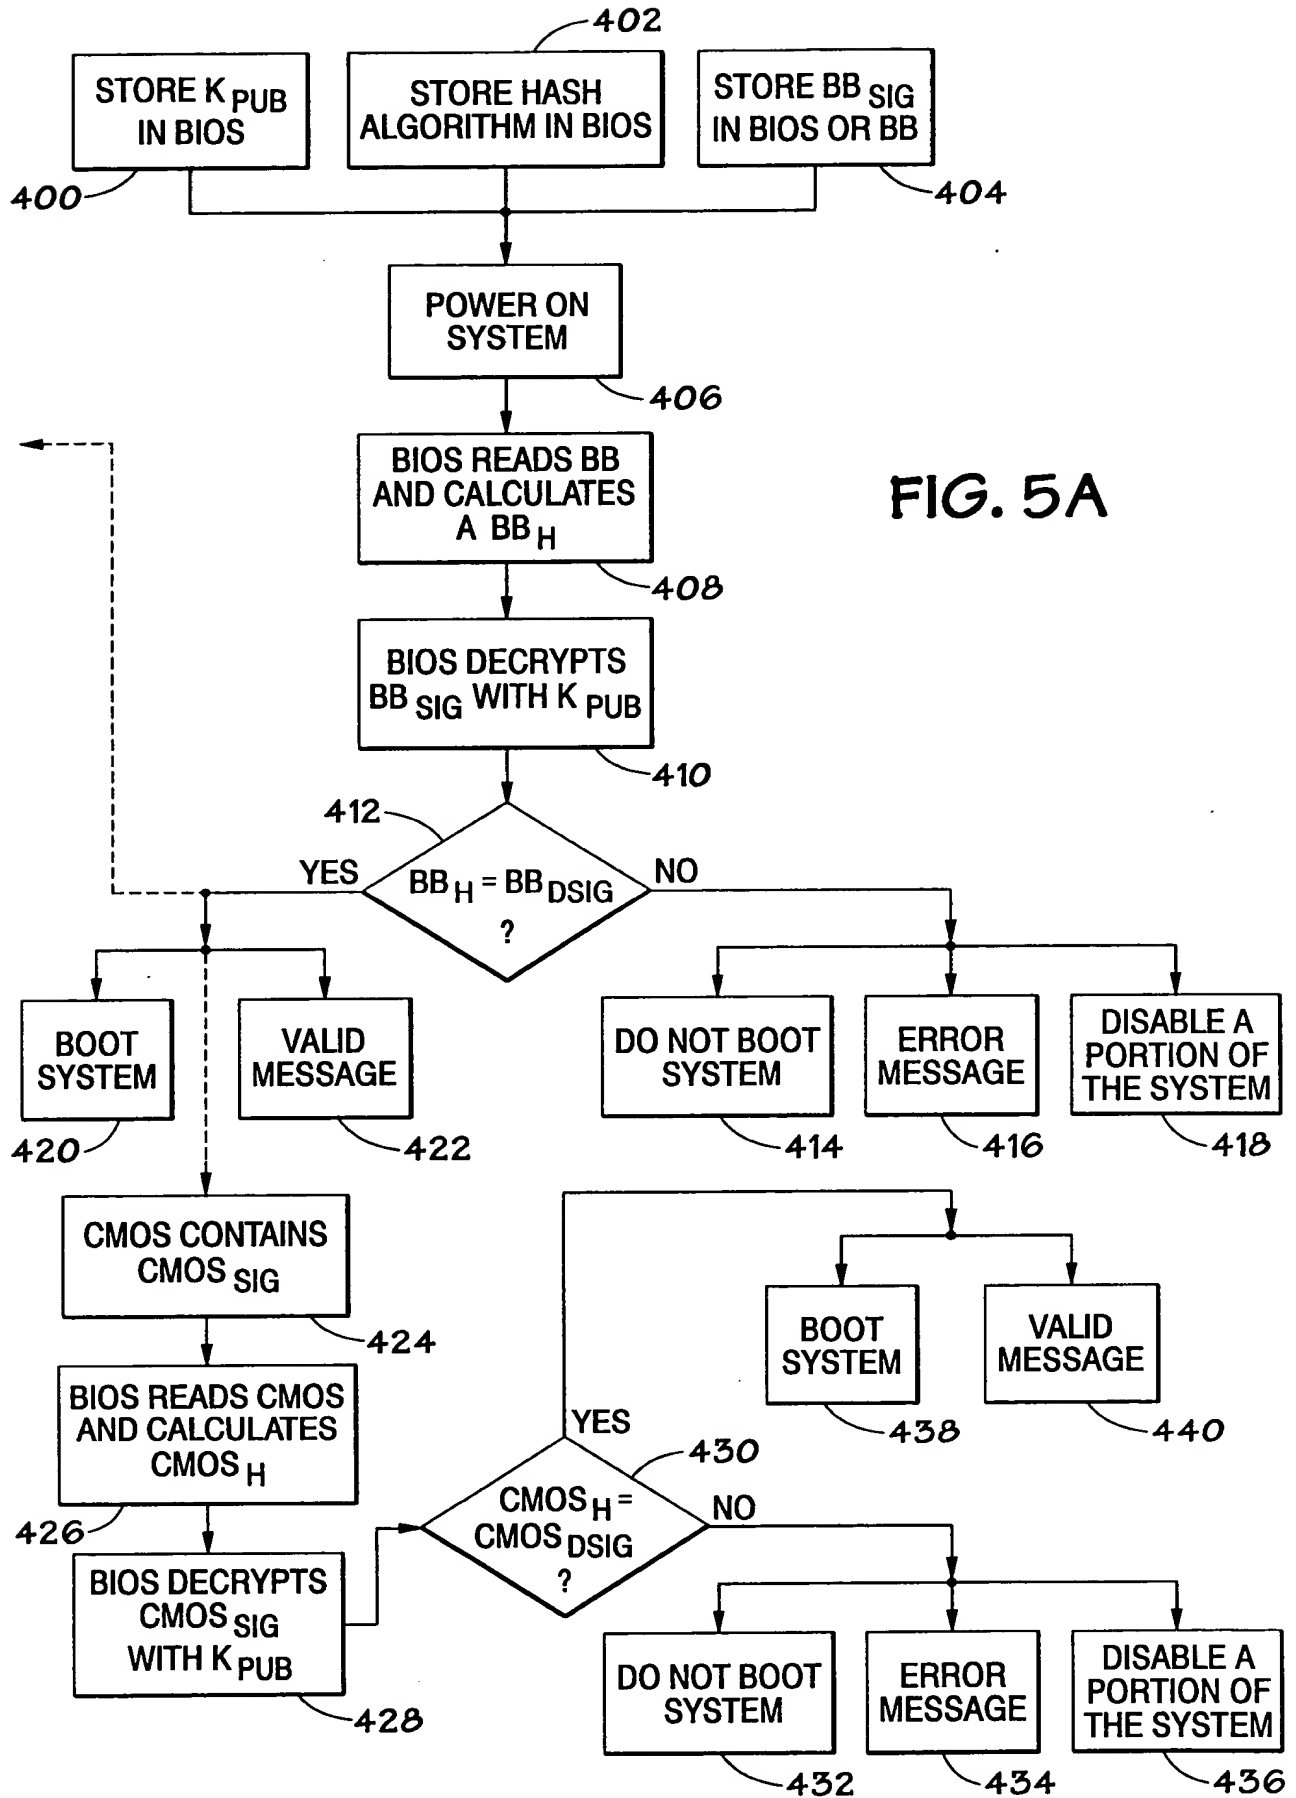


FIG. 5B

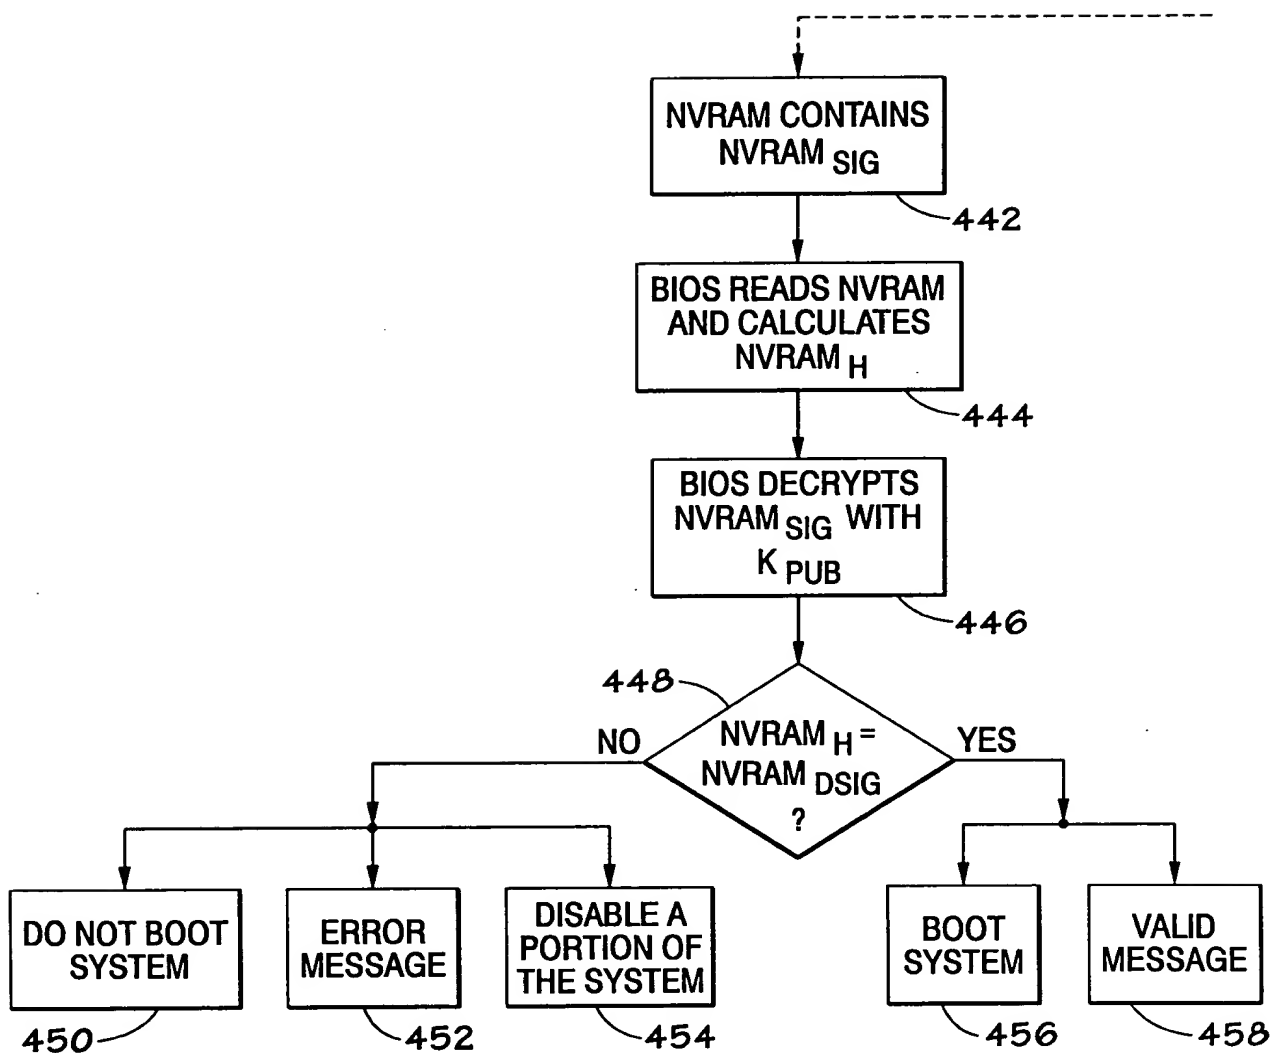


FIG. 6A

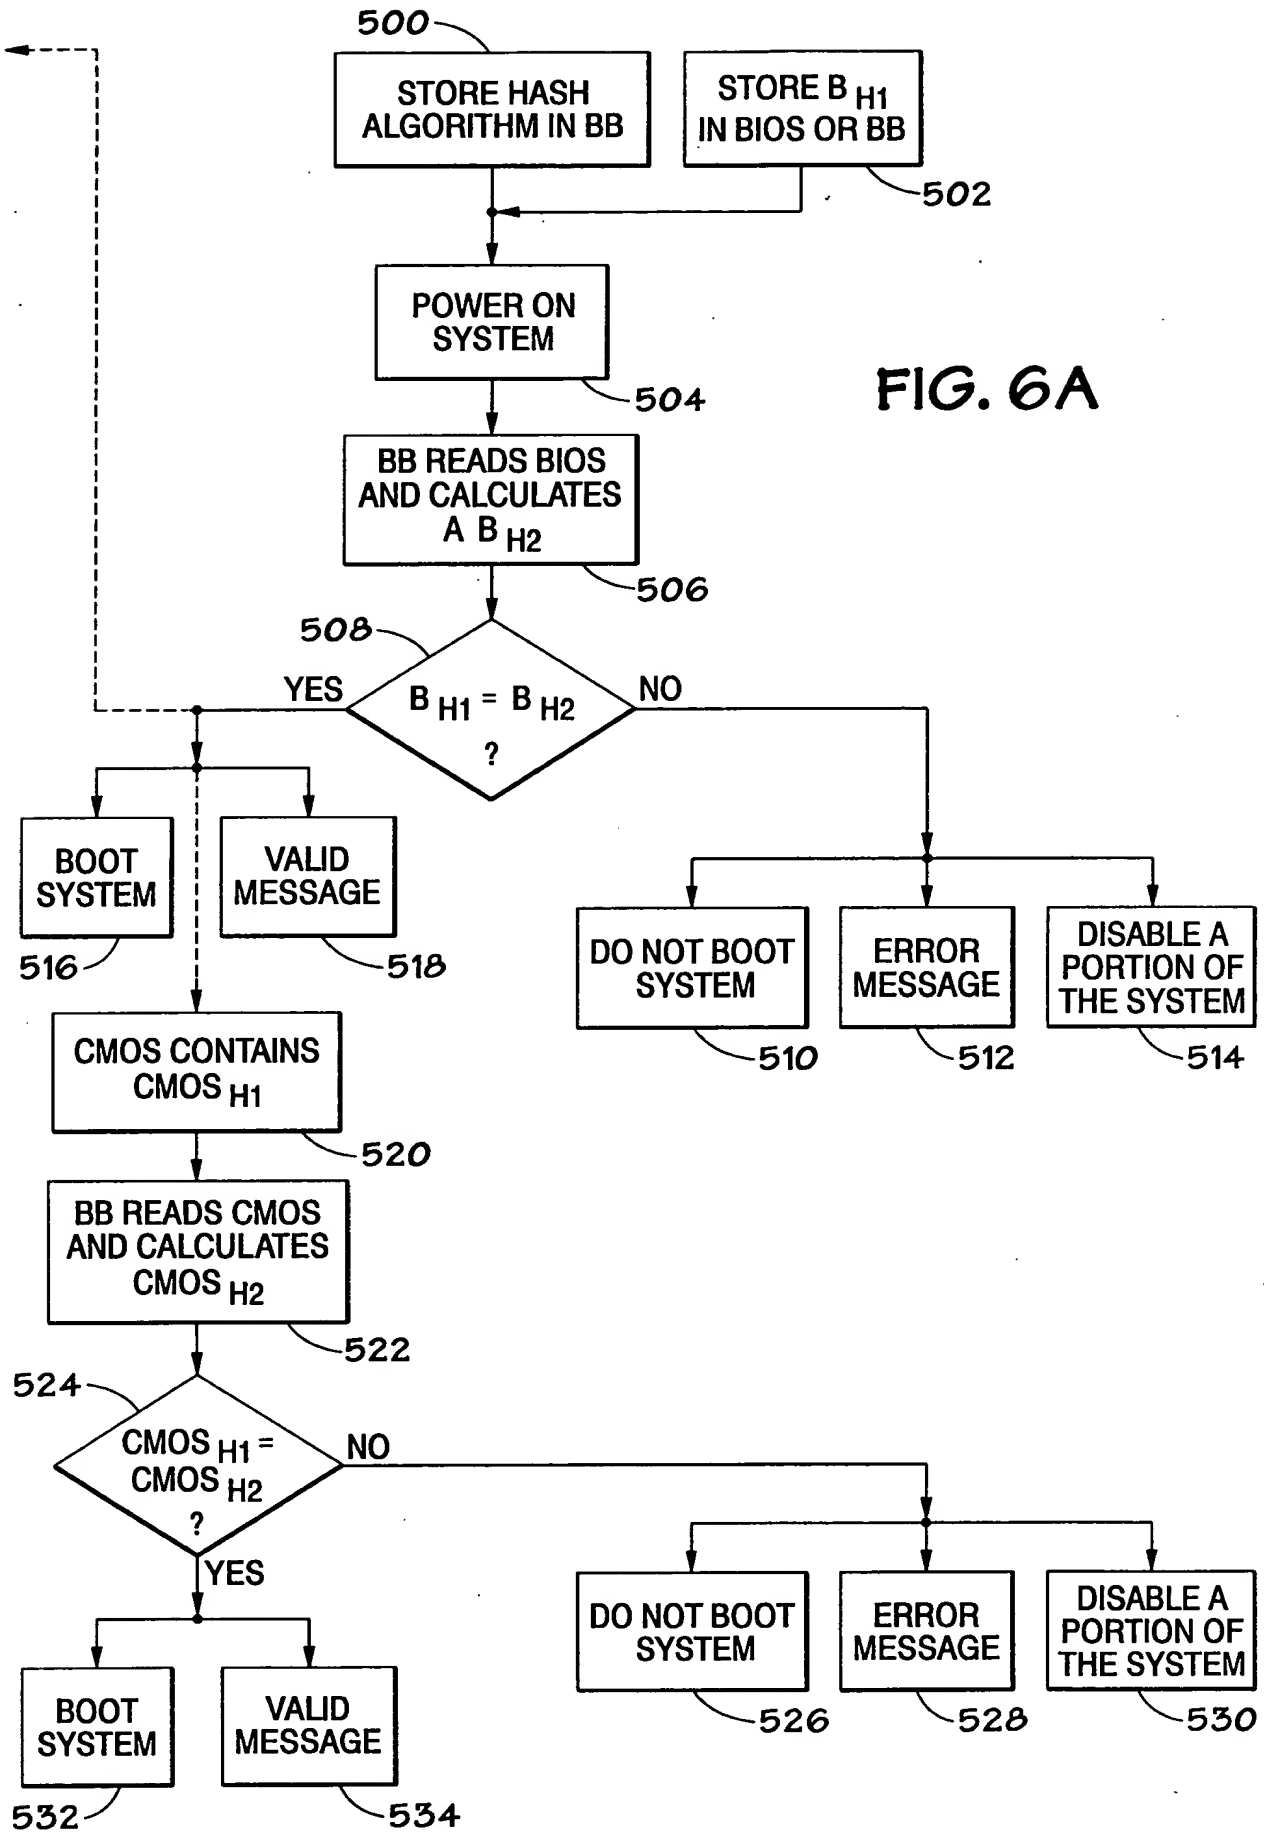


FIG. 6B


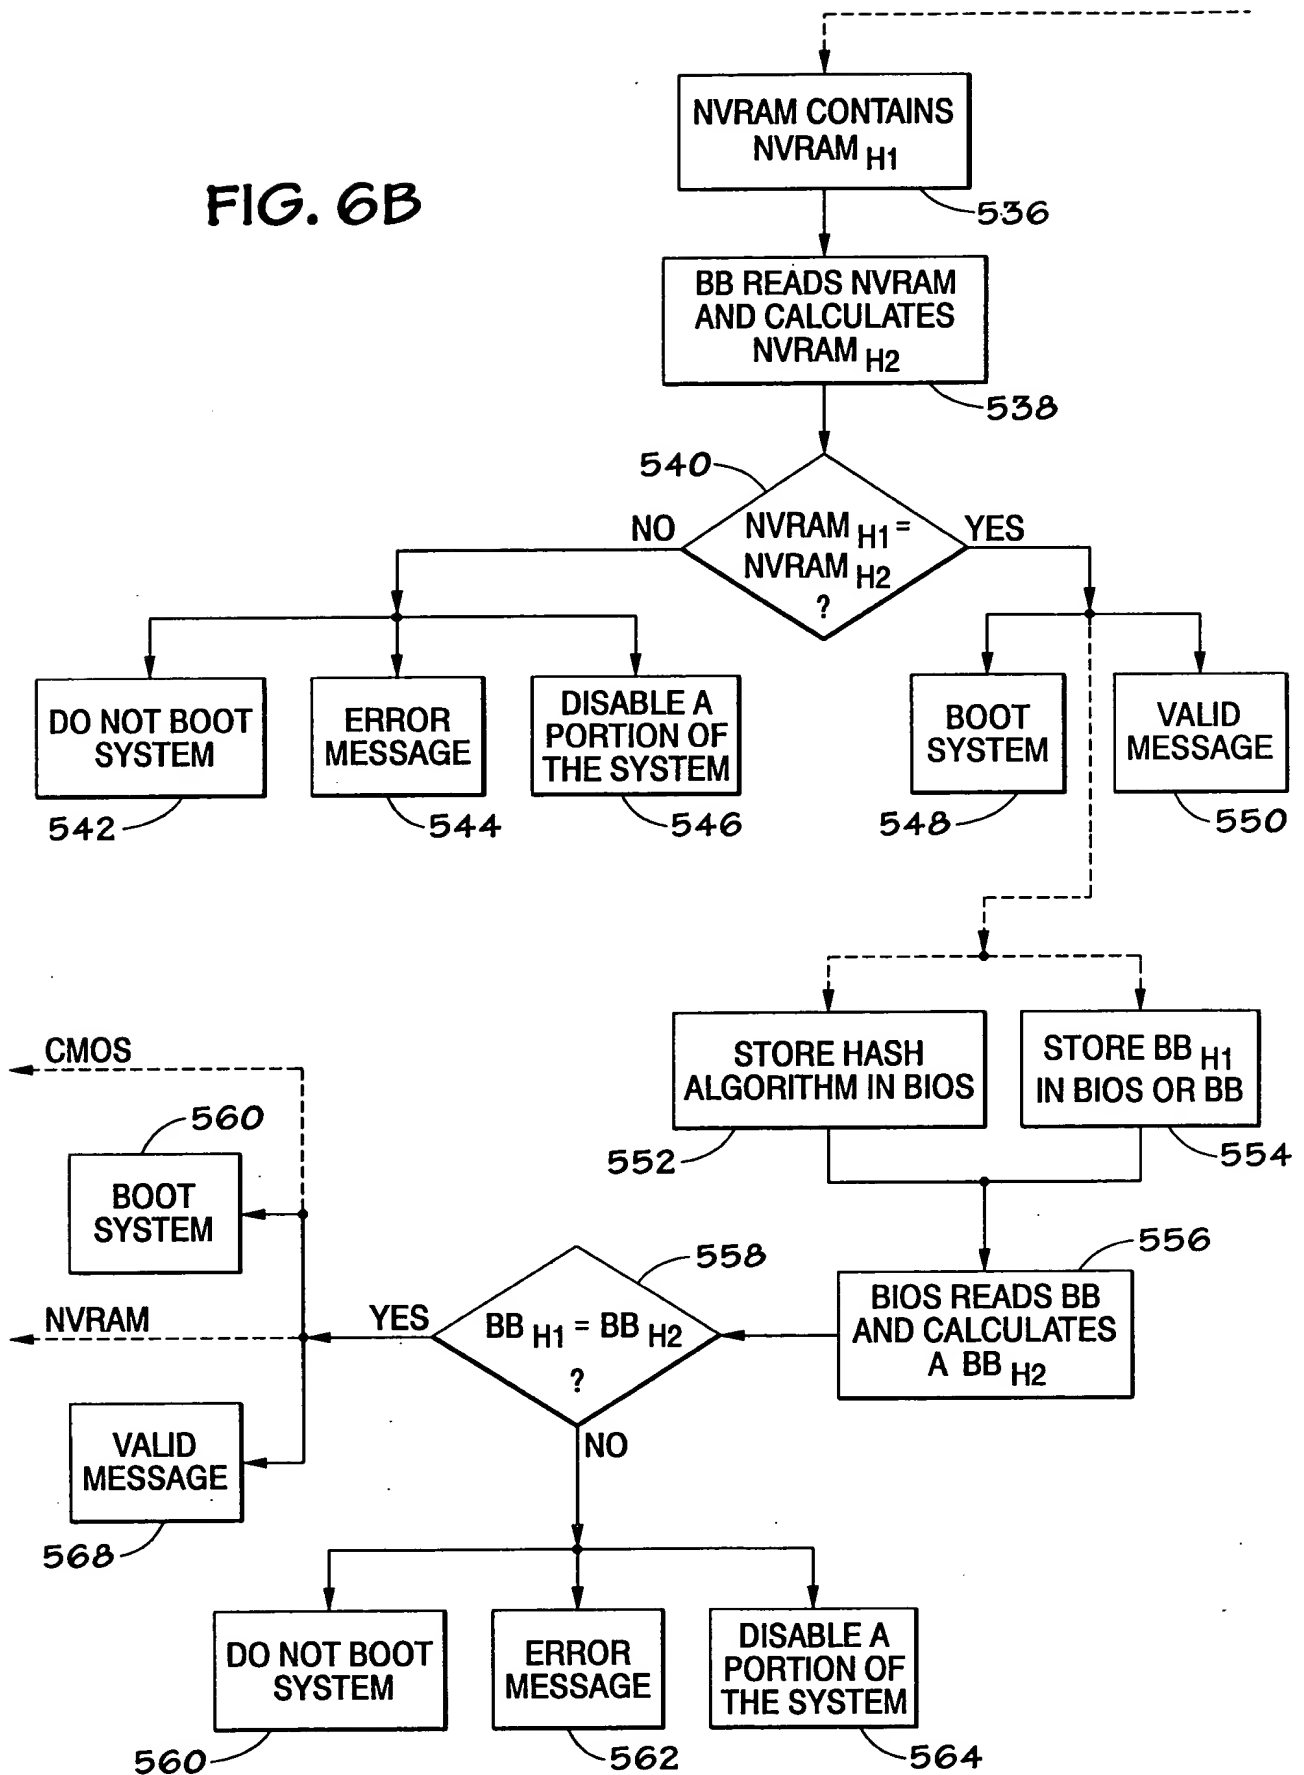


FIG. 6C

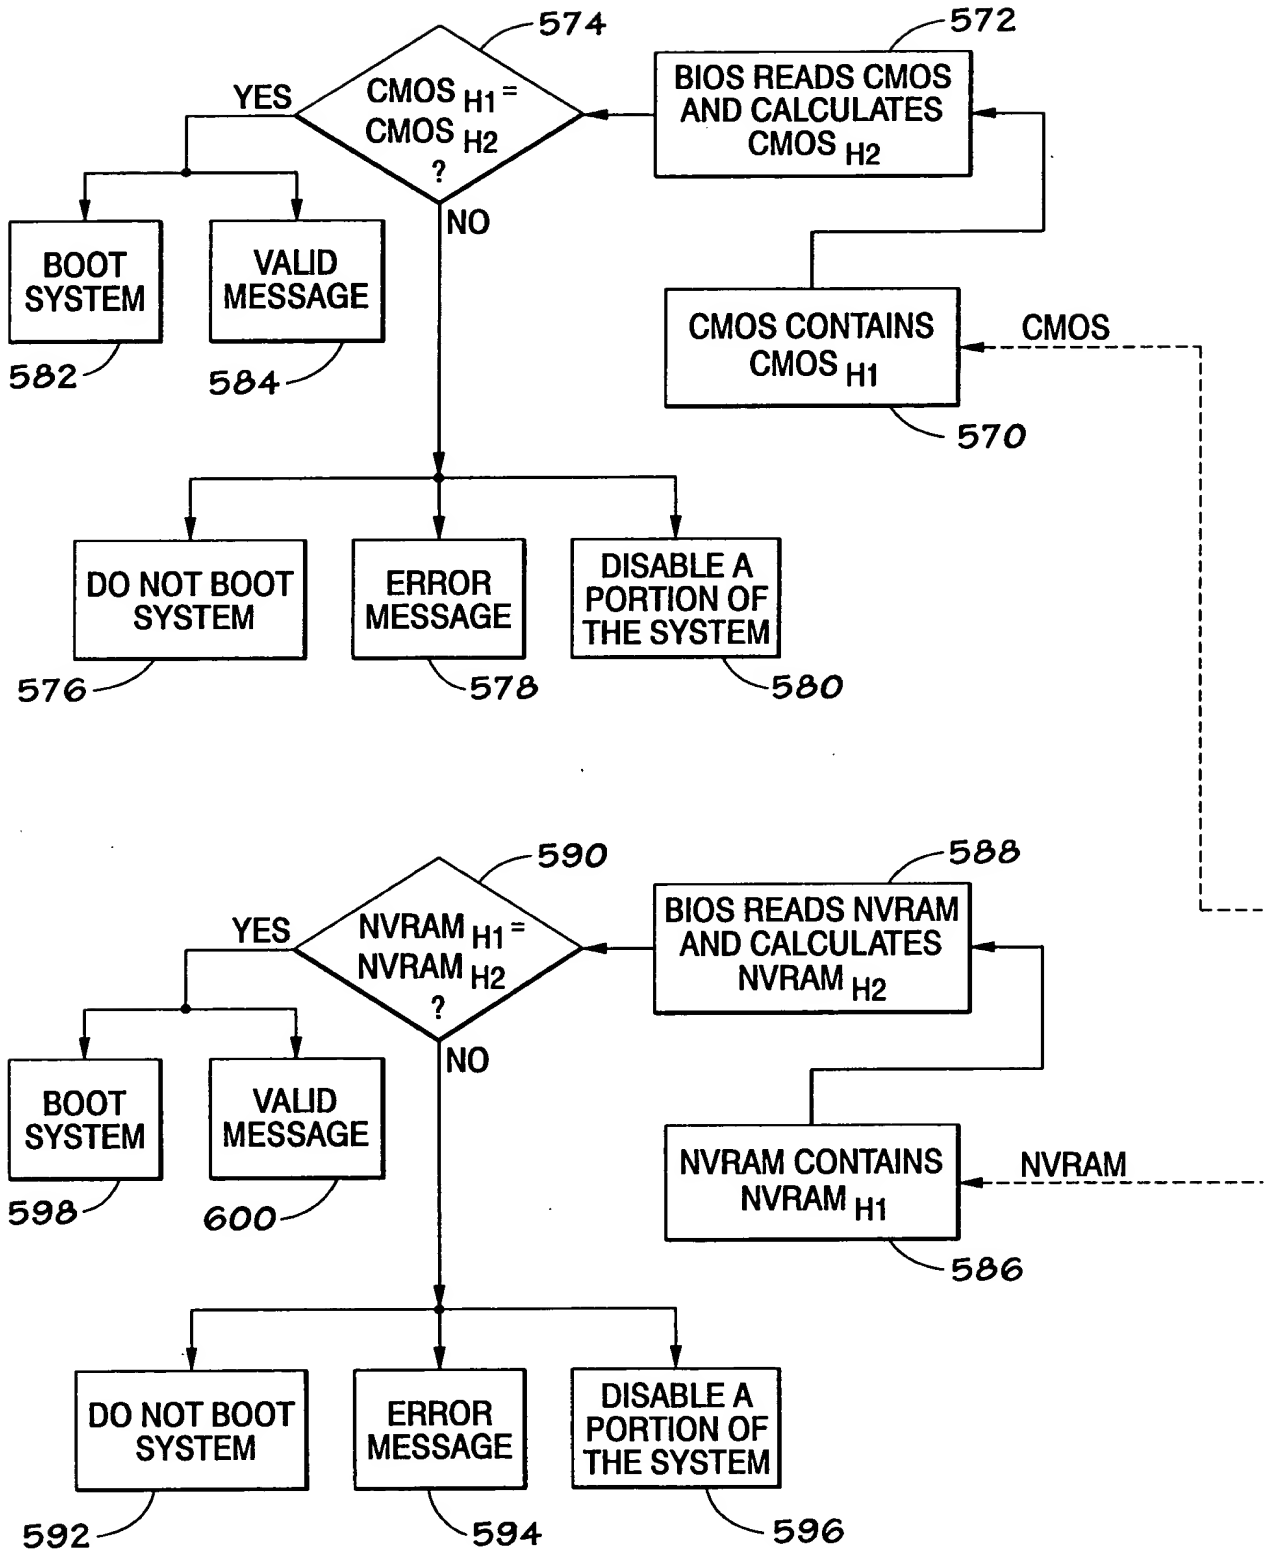

SYMBOL	DESCRIPTION
K _{PUB}	PUBLIC KEY
B _H	BIOS HASH
B _{SIG}	BIOS SIGNATURE(BIOS ENCRYPTED HASH)
B _{DSIG}	BIOS SIGNATURE DECRYPTED
B _{H1}	BIOS HASH THAT SHOULD BE PRESENT
B _{H2}	BIOS HASH THAT IS PRESENT
BB	BOOT BLOCK
BB _H	BOOT BLOCK HASH
BB _{SIG}	BOOT BLOCK SIGNATURE (BOOT BLOCK ENCRYPTED HASH)
BB _{DSIG}	BOOT BLOCK SIGNATURE DECRYPTED
BB _{H1}	BOOT BLOCK HASH THAT SHOULD BE PRESENT
BB _{H2}	BOOT BLOCK HASH THAT IS PRESENT
CMOS _H	CMOS HASH
CMOS _{SIG}	CMOS SIGNATURE (CMOS ENCRYPTED HASH)
CMOS _{DSIG}	CMOS SIGNATURE DECRYPTED
CMOS _{H1}	CMOS HASH THAT SHOULD BE PRESENT
CMOS _{H2}	CMOS HASH THAT IS PRESENT
NVRAM _H	NVRAM HASH
NVRAM _{SIG}	NVRAM SIGNATURE (NVRAM ENCRYPTED HASH)
NVRAM _{DSIG}	NVRAM SIGNATURE DECRYPTED
NVRAM _{H1}	NVRAM HASH THAT SHOULD BE PRESENT
NVRAM _{H2}	NVRAM HASH THAT IS PRESENT

FIG. 7